1229

Concealed rough brass flush valve, diaphragm type, externally adjustable for water conservation, with 1" wheel handle angle stop with back-check, renewable main valve seat, equipped with push-button hydro-flush actuator through wall, wall flange, "Turn-to-Silence" equipment, with "Kwikfit" threaded union tailpiece, vacuum breaker, elbow flush connection for 1½"concealed back spud. All exposed parts chrome plated. Includes 194 Sweat Adaptor.

Variations

- ☐ -3 – Water saver equipment
- ☐ A – Screwdriver operated stop
- ☐ B – ½" Push button
- ☐ T8 – Sweat inlet stop
- ☐ Y – 1" Straight stop
- ☐
- ☐

Remarks

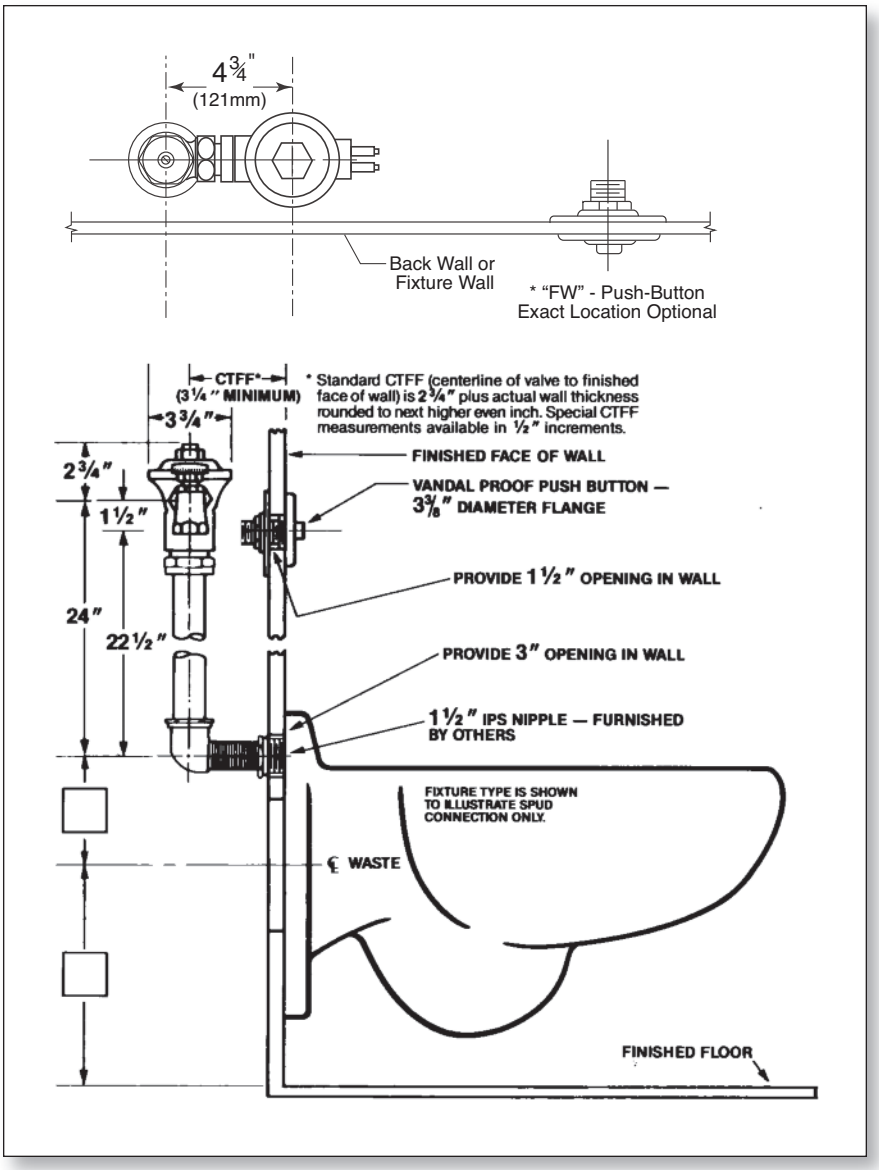

Delany Products™ Since 1879

P.O. Box 411 · Charlottesville · VA · 22902 • USA
Phone: (434) 296-0166 · Fax (434) 977-3596
Email: info@delanyproducts.com
Web: www.delanyproducts.com

©2009