1214-1.6

"L.C." LOW CONSUMPTION FLUSH VALVE (1.6 GALS. PER FLUSH)

Polished chrome plated flush valve, diaphragm type, 1.6 gallons per flush, externally adjustable for water conservation, with 1" capped screwdriver angle stop with back-check, renewable main valve seat, equipped with push-button hydro-flush actuator through wall, wall plate for use with two gang gem box, wall flange, "Turn-to-Silence" equipment, with "Kwikfit" threaded union tailpiece, vacuum breaker, wall flange, spud nut and spud flange for 1½" top spud.
Includes 194K Sweat Adaptor Kit.

Variations

- ☐ -3 – Water saver equipment
- ☐ T6 – Heavy cast wall flange with allen head set screw
- ☐ T8 – Sweat inlet stop
- ☐ T36 – Solid ring wall support for flush connection
- ☐ T46 – Split ring wall support for flush connection

Remarks

✻ *For use with 1.6 gallon low consumption water closet*

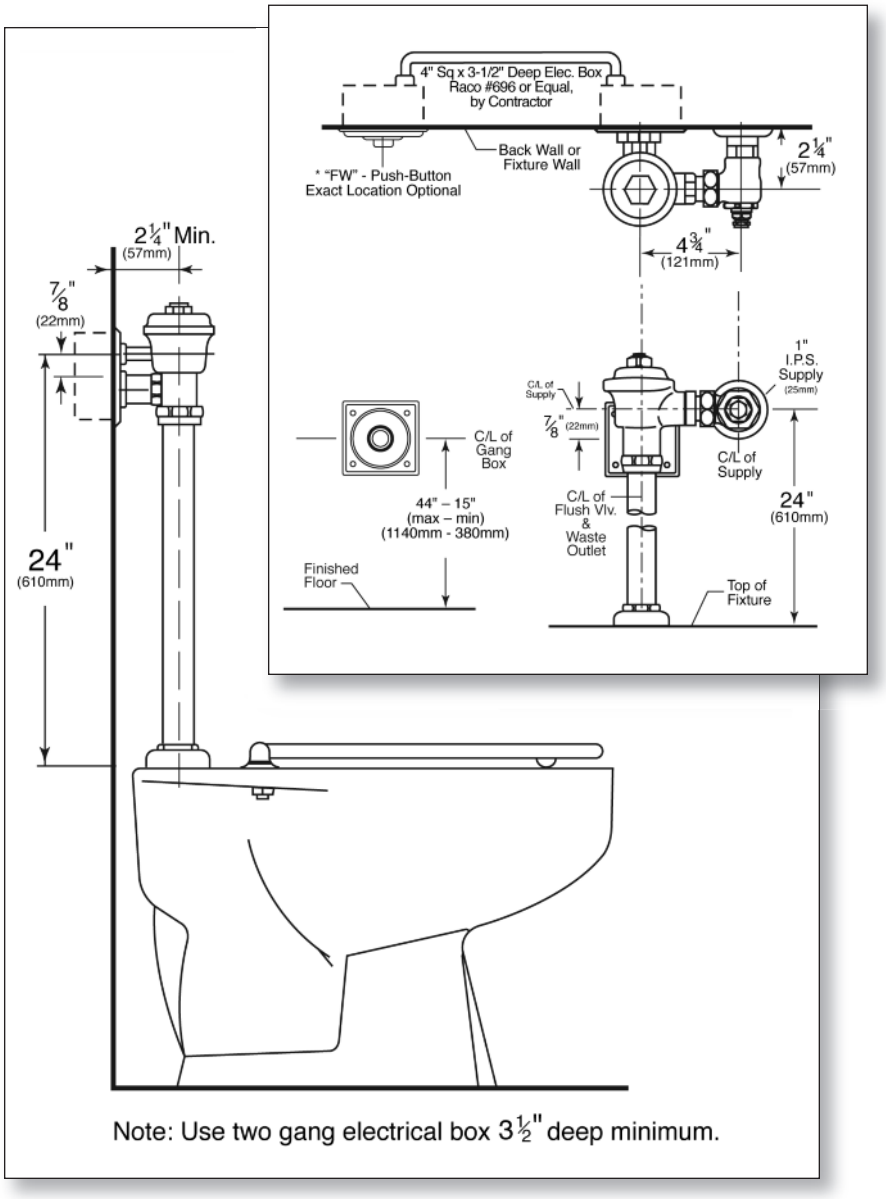

Delany Products™ Since 1879

P.O. Box 411 · Charlottesville · VA · 22902 • USA
Phone: (434) 296-0166 · Fax (434) 977-3596
Email: info@delanyproducts.com
Web: www.delanyproducts.com

©2009