1252-1

"L.C." LOW CONSUMPTION FLUSH VALVE (1.0 GALS. PER FLUSH)

Polished chrome plated flush valve, diaphragm type, 1.0 gallons per flush, externally adjustable for water conservation, with 1" capped screw-driver angle stop with back-check, renewable main valve seat, equipped with push-button hydro-flush actuator through wall, wall plate for use with two gang gem box, wall flange, "Turn-to-Silence" equipment, with "Kwikfit" threaded union tailpiece, vacuum breaker, wall flange, spud nut and spud flange for 1¼" top spud. Includes 194K Sweat Adaptor Kit.

Variations

- ☐ H – Flush connection for 1½" spud
- ☐ R – Wheel handle operated stop
- ☐ T36 – Solid ring wall support for flush connection
- ☐ T46 – Split ring wall support for flush connection

Remarks

✻ *For use with 1.0 gallon low consumption urinals*

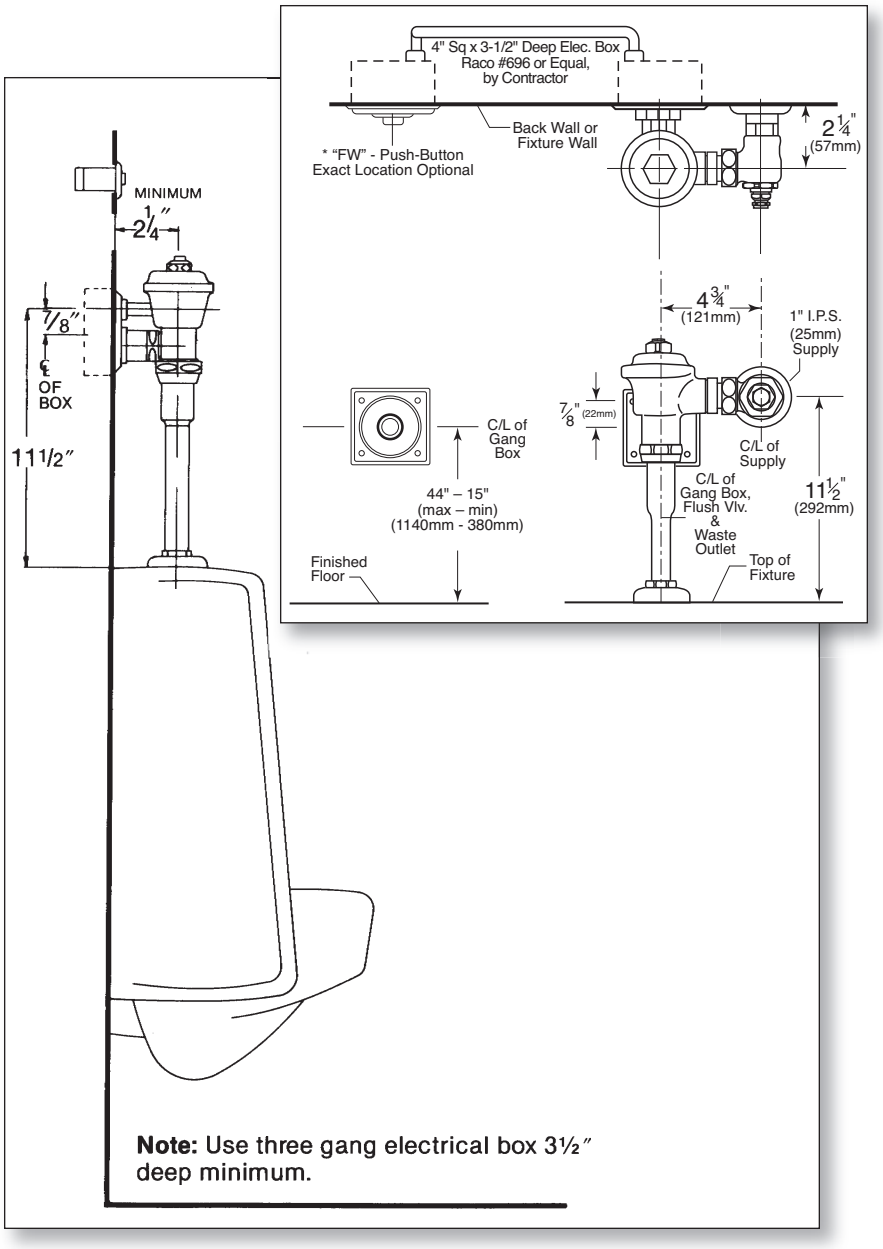

Delany Products™ Since 1879

P.O. Box 411 · Charlottesville · VA · 22902 • USA
Phone: (434) 296-0166 · Fax (434) 977-3596
Email: info@delanyproducts.com
Web: www.delanyproducts.com

©2009