


Specification: Presto rough brass flush valve, diaphragm type, externally adjustable for water conservation, with 1" wheel handle angle stop with back-check, renewable main valve seat, metal "Rubberflex" oscillating handle, "Turn-to-Silence" equipment, with "Kwikfit" threaded union tailpiece, vacuum breaker, spud nut. Parts No. 36 and No. 224 are in polished chrome.

Variations

- A - Screwdriver operated stop
- T7 - Handle in nickel-silver
- T8 - Sweat inlet stop
- T37 - Non-syphon bypass
- T42 - Sweat adapter kit for stop
-
-

Remarks

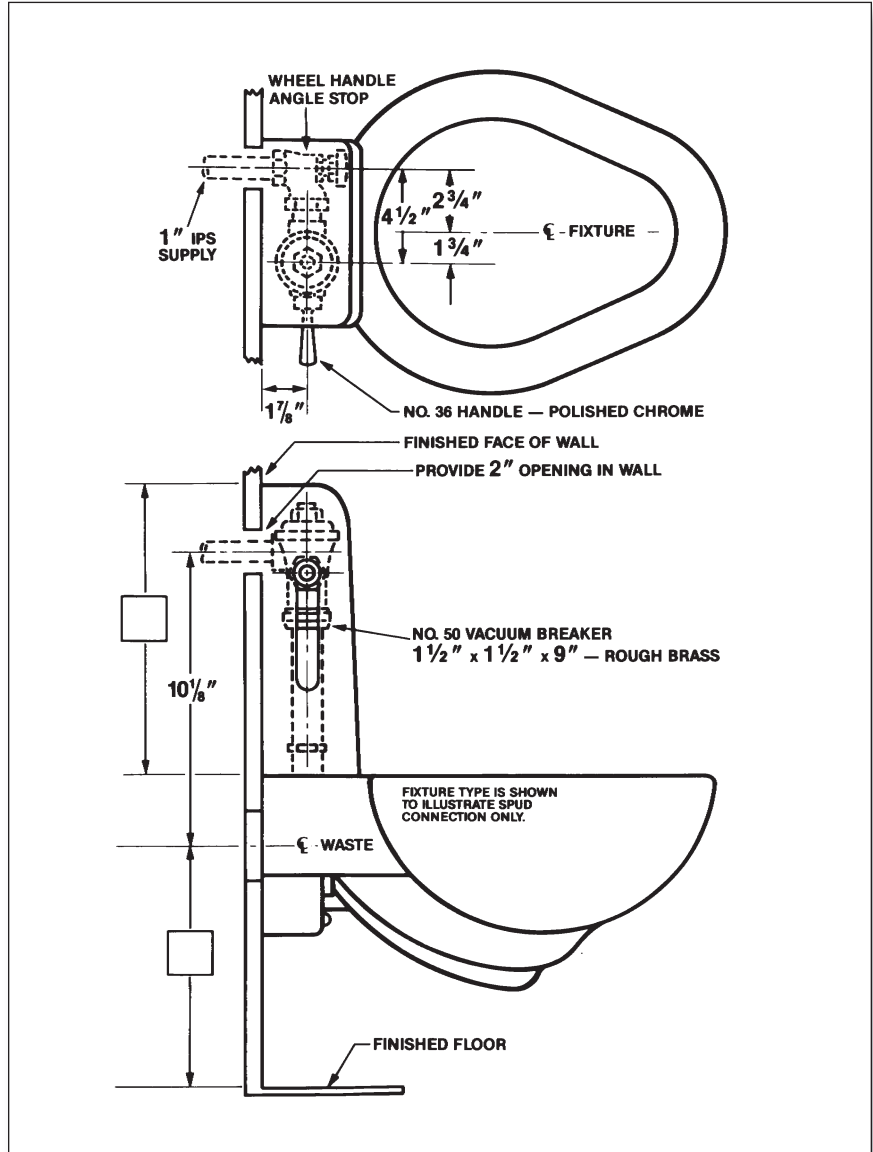

Recommended For: Heavy duty installations where abuse of equipment is expected but it is impractical to conceal valves behind wall. Valve is readily serviced by removing security cover. Delany is only diaphragm type valve currently available that will rough into limited space provided.



P.O. Box 411 · Charlottesville · VA · 22902 · USA
 Phone: (434) 296-0166 · Fax (434) 977-3596
 Email: info@delanyproducts.com
 Web: www.delanyproducts.com
 ©2009