568-2V

Specification: Two valve combination consisting of a water closet valve and one cold (or hot) lavatory valve. All valves are concealed rough brass flush valves, diaphragm type, externally adjustable for water conservation, renewable main valve seat, metal "Rubberflex" push-button through wall and/or fixture back splash, "Turn-to-Silence" equipment, with "Kwikfit" threaded union tailpiece, twin body openings for roughing left or right. Water closet valve has 1" wheel handle angle stop with back-check, vacuum breaker, elbow flush connection for 1½" concealed back spud. Lavatory valve has ½" wheelhandle angle stop, ½" I.P. flush connection to spout. All exposed parts polished chrome.

Variations

- ☐ A – Screwdriver operated stop
- ☐ C – 3" Oscillating disc
- ☐ S – ¾" Angle stops
- ☐ T7 – Nickel-silver handle, push-button, or oscillating disc, as applicable
- ☐ T8 – Direct sweat inlet stop
- ☐ T27 – ¾" Straight stops
- ☐ T37 – Non-syphon bypass
- ☐ T39 – Matching faucet hole cover assembly
- ☐ T42 – Sweat Adapter kit for stop
- ☐ T43 – 4" Offset in No. 428A—22½" flush connection
- ☐ T48 – Valve for use with an access box
- ☐ Y – 1" Straight stop

Remarks

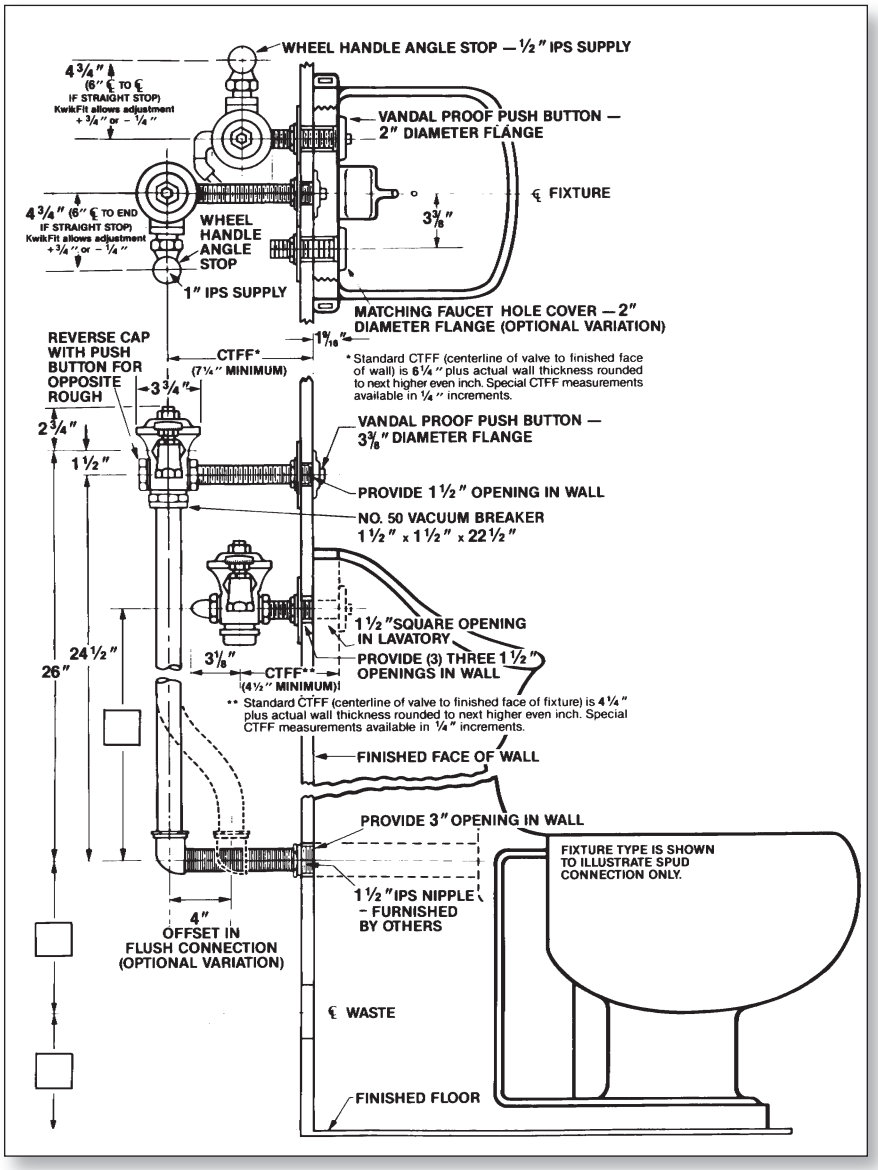

Recommended For: Penal or heavier duty installations where vandalism and abuse are common. Lavatory valves provide substantial water savings through consistent metering, can be piped for cold water or tempered water as desired. Matching cover assembly available for other lavatory punching as optional variation. No part of valves can be removed from front of wall. Access for future repairs must be provided.

Delany Since 1879 Products™

P.O. Box 411 · Charlottesville · VA · 22902 • USA
Phone: (434) 296-0166 · Fax (434) 977-3596
Email: info@delanyproducts.com
Web: www.delanyproducts.com

©2009