

“L.C.” LOW CONSUMPTION
FLUSH VALVE (1.0 GALS. PER FLUSH)


Specification: Polished chrome plated flush valve, diaphragm type, 1.0 gallons per flush, externally adjustable for water conservation, with $\frac{3}{4}$ " capped screwdriver angle with back-check, renewable main valve seat, metal “Rubberflex” oscillating handle, “Turn-to-Silence” equipment, with “Kwikfit” threaded union tailpiece, vacuum breaker, wall flange, spud nut and spud flange for $\frac{3}{4}$ " top spud.

Variations

- C – 3" Oscillating disc
- L – Handle or push-button on front of valve
- T6 – Heavy cast wall flange with allen head set screw
- T7 – Nickel-silver handle, push-button, or oscillating disc, as applicable
- T28 – Oscillating handle
- T36 – Solid ring wall support for flush connection
- T42 – Sweat adapter kit for stop

Remarks

* For use with 1.0 gallon low consumption urinals

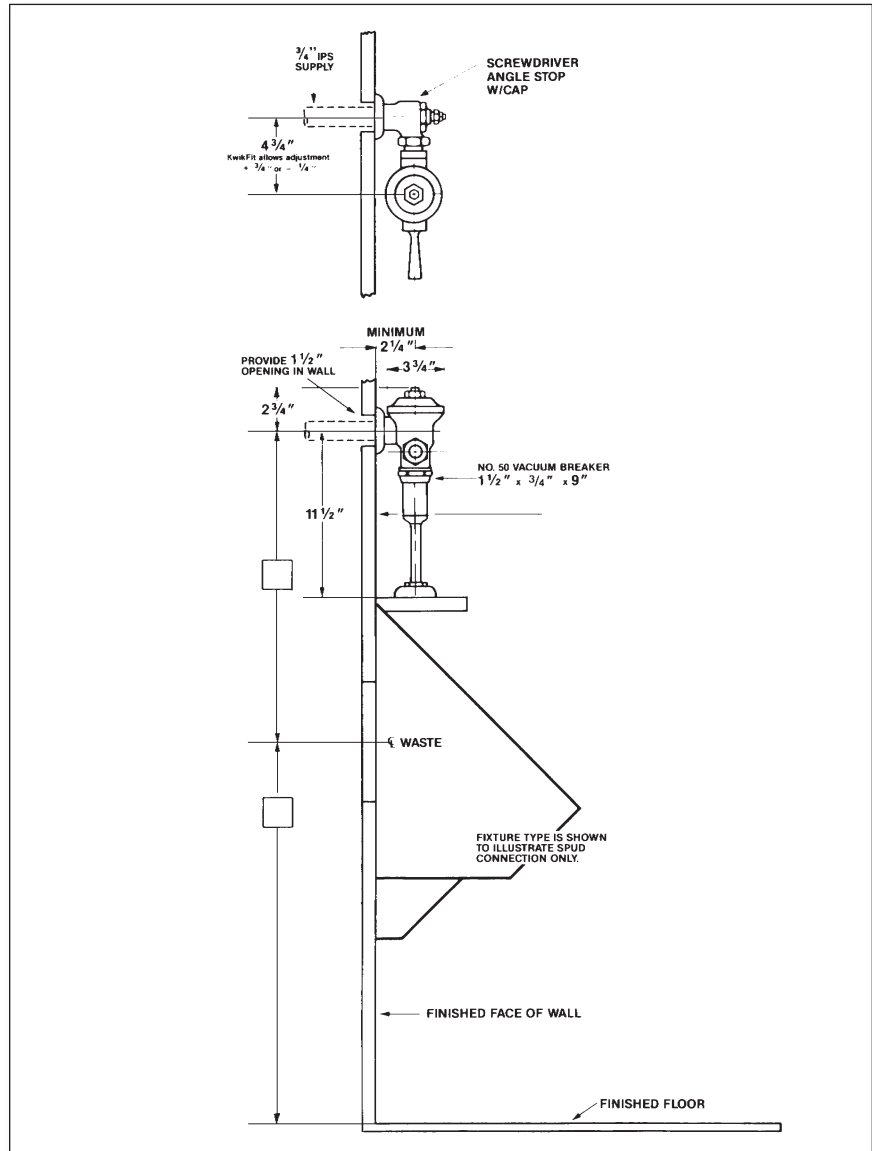

Recommended For: Heavy duty installations where abuse of equipment is expected but it is impractical to conceal valves behind wall.

