575

Specification: Polished chrome plated flush valve, diaphragm type, externally adjustable for water conservation, with ¼"capped screwdriver angle with back-check, renewable main valve seat, metal "Rubberflex" oscillating handle, "Turn-to-Silence" equipment, with "Kwikfit" threaded union tailpiece, vacuum breaker, wall flange, spud nut and spud flange for ¼" top spud.

Variations

- ☐ C – 3" Oscillating disc
- ☐ L – Handle or push-button on front of valve
- ☐ T6 – Heavy cast wall flange with allen head set screw
- ☐ T7 – Nickel-silver handle, push-button, or oscillating disc, as applicable
- ☐ T28 – Oscillating handle
- ☐ T36 – Solid ring wall support for flush connection
- ☐ T42 – Sweat adapter kit for stop
- ☐
- ☐

Remarks

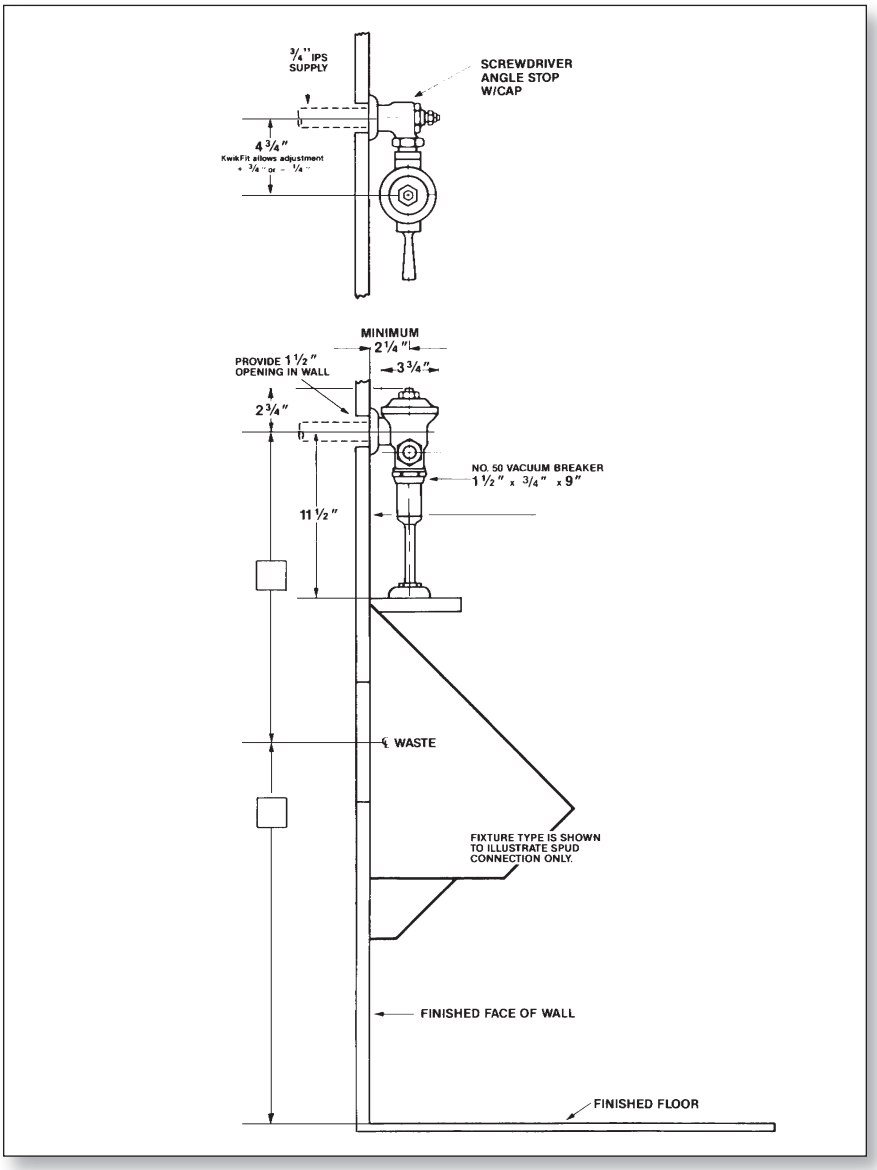

Recommended For: Heavy duty installations where abuse of equipment is expected but it is impractical to conceal valves behind wall.

Delany Since 1879 Products™

P.O. Box 411 · Charlottesville · VA · 22902 • USA
Phone: (434) 296-0166 · Fax (434) 977-3596
Email: info@delanyproducts.com
Web: www.delanyproducts.com

©2009