


**S**pecification: Concealed rough brass flush valve, diaphragm type, externally adjustable for water conservation, with  $\frac{3}{4}$ " wheel handle angle stop with back-check, renewable main valve seat, metal "Rubberflex" push-button through wall, wall flange, "Turn-to-Silence" equipment, with "Kwikfit" threaded union tailpiece, twin body openings for roughing left or right, vacuum breaker, elbow flush connection for  $\frac{3}{4}$ " concealed back spud. All exposed parts polished chrome.

**Variations**

- B -  $\frac{1}{2}$ " Push-button
- C - 3" Oscillating disc
- T6 - Heavy cast wall flange with allen head set screw
- T7 - Nickel-silver handle, push-button, or oscillating disc, as applicable
- T27 -  $\frac{3}{4}$ " Straight stop
- T42 - Sweat adapter kit for stop
- T48 - Valve for use with an access box
- 
- 

**Remarks**

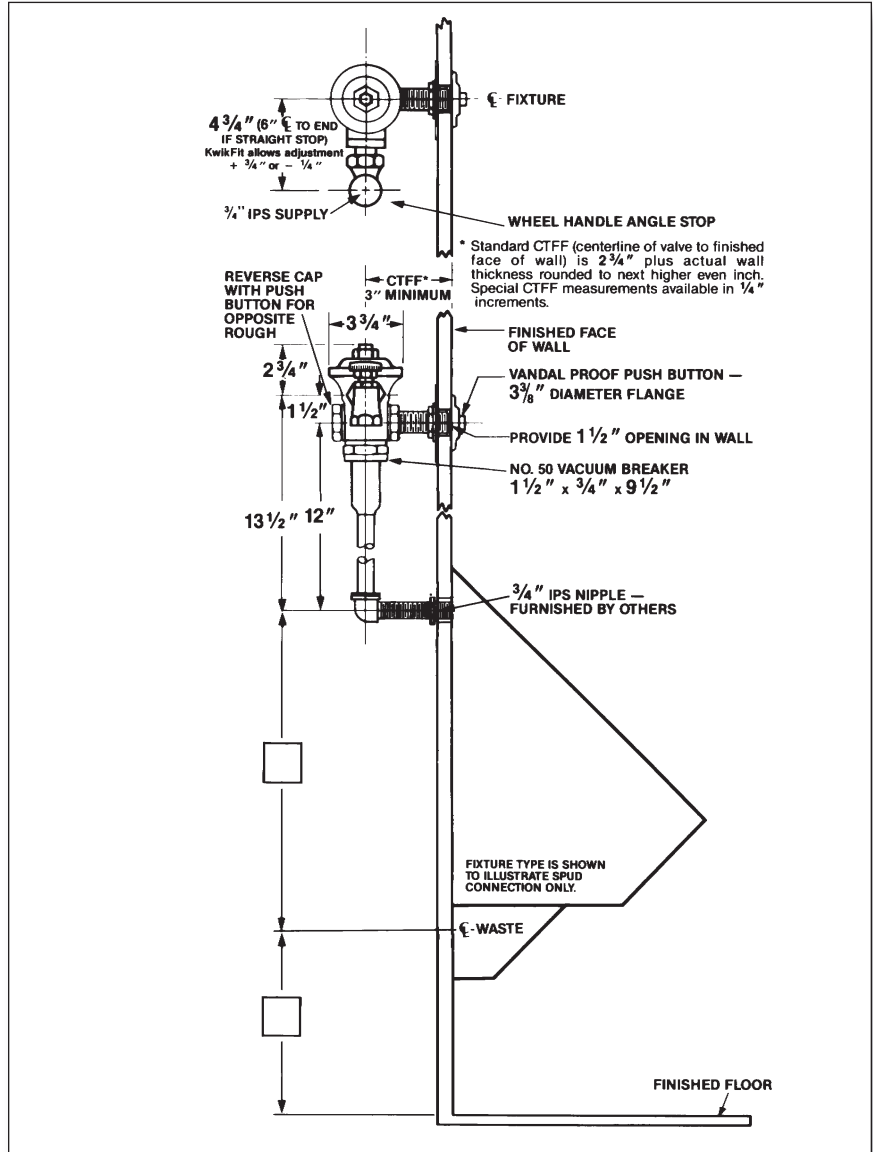

**Recommended For:** Penal or heavier duty installations where vandalism and abuse are common. No parts of valve can be removed from front face of wall. Access to rear of wall for future service of valve and vacuum breaker must be provided.



P.O. Box 411 · Charlottesville · VA · 22902 · USA  
 Phone: (434) 296-0166 · Fax (434) 977-3596  
 Email: info@delanyproducts.com  
 Web: www.delanyproducts.com  
 ©2009