


# 666-2V

**S**pecification: Two valve combination as follows: concealed rough brass flush valve, diaphragm type, externally adjustable for water conservation, with 1/2" wheel handle angle stop, renewable main valve seat, metal "Rubberflex" push-button through wall and fixture back splash, back splash flange, with "Kwikfit" threaded union tailpiece, 1/2" I.P. flush connection to spout with 0.5gpm flow control. All exposed parts polished chrome.

**Variations**

- A - Screwdriver operated stop
- S - 3/4" Angle stops
- T7 - Nickel-silver handle, push-button, or oscillating disc, as applicable
- T8 - Sweat inlet stops
- T27 - 3/4" Straight stop
- T37 - Non-syphon bypass
- 
- 

**Remarks**

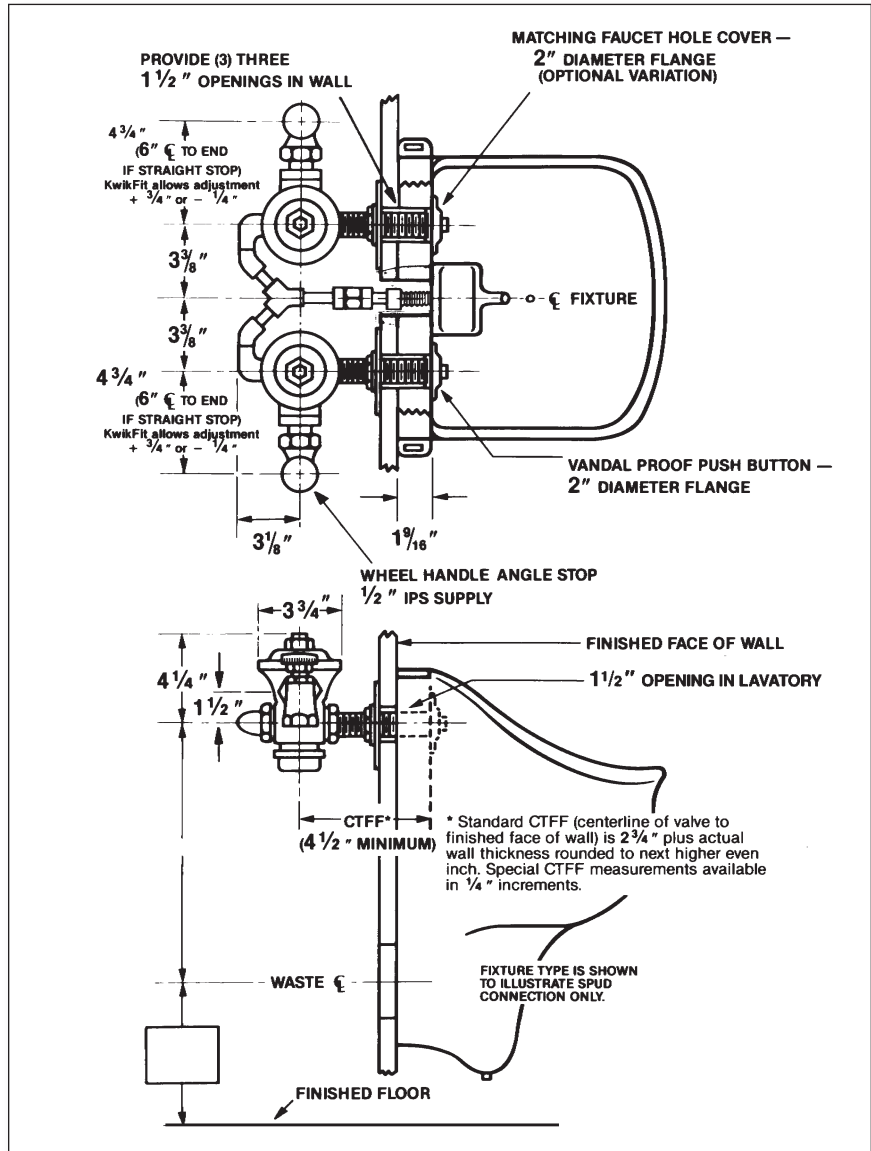

**Recommended For:** Heaviest duty installations where consistent metering of water is necessary or merely desirable. Usual practice is to provide tempered water through one valve and cold water through the other. Long service life can be expected together with substantial water savings. No part of valve can be removed from front face of wall. Access for future repairs must be provided.



Coyne and Delany Co.  
P.O. Box 411 · Charlottesville · VA · 22902 · USA  
Phone: (434) 296-0166 · Fax (434) 977-3596