

U534-1.6

CONCEALED LOW CONSUMPTION TOILET FLUSH VALVE
(1.6 gpf/ 6 Lpf)

ULTRA CONCEALED

Description

Concealed rough brass flush valve for floor mounted or wall hung water closets with 1.5" concealed back spud.

Flush Cycle

1.6 gpf / 6 Lpf Low Consumption

Specification

- Regulating screw for "True-in-the-Field" water conservation.
- Sweat adapter kit.
- 1" vandle resistant capped screwdriver angle stop with back-check.
- Renewable main valve seat.
- Metal "Rubberflex" 1/2" pushbutton through wall assembly.
- 1.5" x 22.5" vacuum breaker flush connection for back entry.
- Ground joint tailpiece.
- All rubber parts molded of chloramine resistant rubber.
- All exposed parts chrome plated.


Variations

- ☐ C - 3" Oscillating Disc
- ☐ T28 - Oscillating handle
- ☐ T48 - Valve for use with an access panel
- ☐ TS - TruStop 1" Angle Control Stop

Access Panels Supplied by Others

* Wall Size Required at time of Order. Size Range from 1" to 12"
Pricing will vary based upon size. *

Valve shall be in compliance to the applicable sections of ASSE 1037

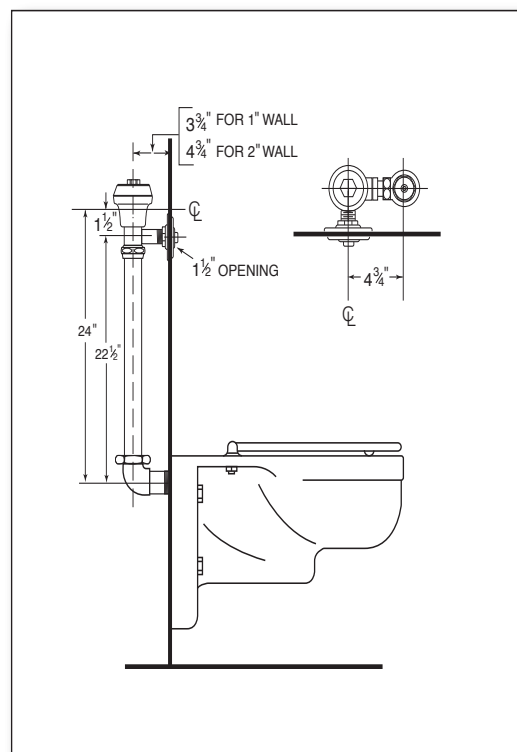

ASSE 1037

