

U571-0.5

CONCEALED HIGH EFFICIENCY URINAL FLUSH VALVE
(0.5 gpf/ 1.9 Lpf)

ULTRA CONCEALED

Description

Concealed rough brass flush valve for urinals with 1.5" concealed back spud.

Flush Cycle

0.5 gpf / 1.9 Lpf High Efficiency

Specification

- Regulating screw for "True-in-the-Field" water conservation.
- Sweat adapter kit.
- 3/4" vandle resistant capped screwdriver angle stop with back-check.
- Renewable main valve seat.
- Metal "Rubberflex" 1/2" pushbutton through wall assembly.
- 0.75" x 12" vacuum breaker flush connection for back entry.
- Ground joint tailpiece.
- All rubber parts molded of chloramine resistant rubber.
- All exposed parts chrome plated.


Variations

- C - 3" Oscillating Disc
- T28 - Oscillating handle
- T48 - Valve for use with an access panel
- TS - TruStop 1" Angle Control Stop

Access Panels Supplied by Others

* Wall Size Required at time of Order. Size Range from 1" to 12"
Pricing will vary based upon size. *

Valve shall be in compliance to the applicable sections of ASSE 1037

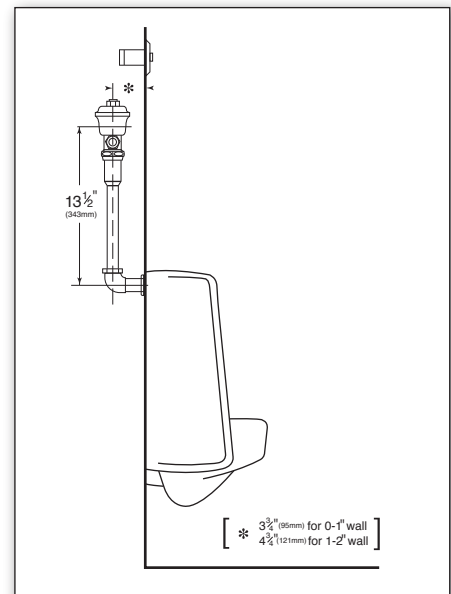

ASSE 1037

P.O. Box 411 • Charlottesville • VA • 22902 • USA Phone: (434) 296-0166 • Fax (434) 977-3596
Email: info@delanyproducts.com Web: www.delanyproducts.com ©2015 v3