

# S414-1.28-TS

HIGH EFFICIENCY TOILET FLUSH VALVE  
(1.28 gpf / 4.8 Lpf per Flush)

## TruSABER

### Description

Exposed chrome plated flush valve for 1-1/2" top spud floor mounted or wall hung water closets..

### Flush Cycle

1.28 gpf / 4.8 Lpf High Efficiency

### Specification

- Regulating screw for "True-in-the-Field" water conservation.
- Mashaerator self-cleaning bypass diaphragm.
- 1" vandle proof TruStop ball valve designed angle control stop with TruChek.
- Sweat adapter kit.
- Renewable main valve seat.
- ADA compliant metal "Rubberflex" oscillating handle.
- Slip-Joint adjustable tailpiece.
- 1.5" X 22.5" vacuum breaker flush connection.
- Wall flange, spud nut and spud flange for 1.5" top spud.
- All rubber parts molded of chloramine resistant rubber.


### Variations

- ☐ AM - Antimicrobial Coated Handle
- ☐ SH - SmartHandle Dual-Flush with Antimicrobial Coating
- ☐ SM - Side mounted battery powered sensor actuator
- ☐ T5 - Non-Hold-Open Feature
- ☐ T6 - Wall flange with allen set screw
- ☐ T36 - Solid ring wall support for flush connection
- ☐ T46 - Split ring wall support for flush connection
- ☐ VPS - Vandal Proof Control Stop with Key
- ☐ Logo - Customized Cover Cap w/ Logo

Valve is certified to be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2



Patented TruStop Control Stop

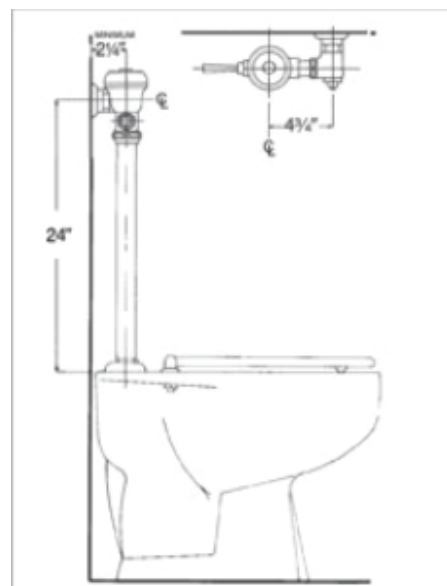

ASSE 1037

P.O. Box 411 • Charlottesville • VA • 22902 • USA Phone: (434) 296-0166 • Fax (434) 977-3596  
Email: [info@delanyproducts.com](mailto:info@delanyproducts.com) Web: [www.delanyproducts.com](http://www.delanyproducts.com) ©2015 v3