

S451-0.5-TS

HIGH EFFICIENCY URINAL FLUSH VALVE
(0.5gpf / 1.9 Lpf per Flush)

TruSABER

Description

Exposed chrome plated flush valve for 0.75" top spud Urinals.

Flush Cycle

0.5gpf / 1.9 Lpf High Efficiency

Specification

- Regulating screw for "True-in-the-Field" water conservation.
- Recessed hex nut for scratch resistant cover.
- Chloramine resistant self-cleaning bypass diaphragm.
- ADA compliant metal "Rubberflex" oscillating handle.
- Renewable main valve seat.
- 1" vandle proof TruStop ball valved designed angle stop with TruChek.
- Sweat adapter kit.
- SlipFit adjustable tailpiece.
- 0.75" x 9" vacuum breaker flush connection.
- Wall flange, spud nut and spud flange for 3/4" top spud.
- All rubber parts molded of chloramine resistant rubber.


Variations

- ☐ AM - Antimicrobial Coated Handle
- ☐ SM - Side mounted battery powered sensor actuator
- ☐ T5 - Non-Hold-Open Feature
- ☐ T6 - Wall flange with allen set screw
- ☐ T36 - Solid ring wall support for flush connection
- ☐ T46 - Split ring wall support for flush connection
- ☐ VPS - Vandal Proof Control Stop with Key
- ☐ Logo - Customized Cover Cap w/ Logo

Valve is certified to be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2



Patented TruStop Control Stop

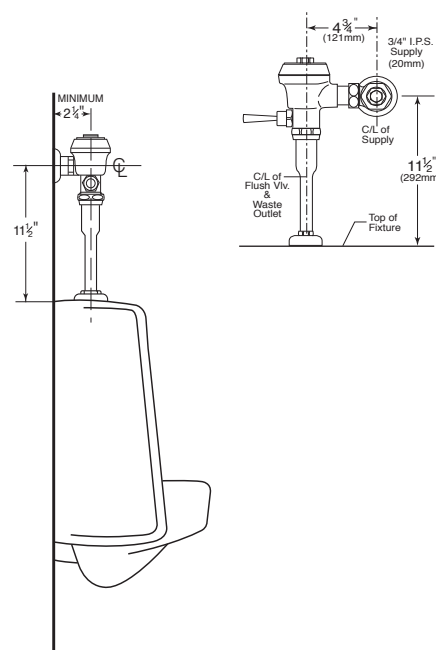

ASSE 1037

