# WATER SAVER TOILET FLUSH VALVE (3.5 gpf / 13.2 Lpf per Flush)

# TruSABER Bedpan Diverter for 34 3/8" Rough-in

### Description

Chrome plated diaphragm operated flush valve with Delany Bedpan Diverter Arm & TruStop contrl stop for 1-1/2" top spud water closets.

### **Flush Cycle**

3.5 gpf / 13.2 Lpf Water Saver


### **Specification**

- Scratch Proof Recessed Hex-nut designed cover
- ° Regulating screw for "True-in-the-Field" water conservation
- ° Mashaerator self-cleaning bypass diaphragm
- ° 1" vandle proof TruStop ball valve designed angle control stop with TruChek.
- Sweat adapter kit.
- o Removeable main valve seat.
- ° ADA compliant metal "Rubberflex" oscillating handle.
- o All rubber material made of chloramine resistant material
- Slip-Joint adjustable tailpiece.
- o Delany Bedpan Diverter Spray Arm
- ° Vacuum breaker w/ 34-3/8" rough-in flush connection
- ° Wall flange, spud nut and spud flange for 1-1/2" top spud

#### **Variations**

- AM Antimicrobial Coated Handle
  SH SmartHandle Dual-Flush with Antimicrobial Coating
- I are an arrange buai-i lusti with Antiliniciobial Coating
- SM SideArm (Side Mounted Sensor Actuator)
- T36 Solid ring wall support for flush connection
- Logo Customized Cover Cap w/ Logo

Valve is certified to be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2

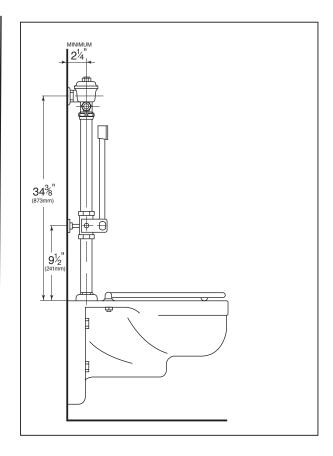



Patented TruStop Control Stop











**ASSE 1037**