# HIGH EFFICIENCY TOILET FLUSH VALVE (1.28 gpf / 4.8 Lpf per Flush)

## TruSABER Bedpan Diverter

#### **Description**

Polished chrome plated diaphragm operated flush valve with Delany Bedpan Diverter valve & TruStop control stop for 1-1/2" top spud water closets.

### Flush Cycle

1.28 gpf / 4.8 Lpf High Efficiency

### **Specification**


- Scratch Proof Recessed Hex-nut designed cover
- ° Regulating screw for "True-in-the-Field" water conservation
- o Mashaerator self-cleaning bypass diaphragm
- ° 1" vandle proof TruStop ball valve designed angle control stop with TruChek.
- <sup>o</sup> Removeable main valve seat.
- ° ADA compliant metal "Rubberflex" oscillating handle.
- o All rubber material made of chloramine resistant material
- ° Slip-Joint adjustable tailpiece.
- ° Sweat adapter kit.
- o Delany Bedpan Diverter Spray Arm
- ° Vacuum breaker w/ 26-1/2" flush connection & 1-1/2" offset
- ° Wall flange, spud nut and spud flange for 1-1/2" top spud

#### **Variations**

□ AM - Antimicrobial Coated Handle
□ SH - SmartHandle Dual-Flush with Antimicrobial Coating
□ SM - SideArm (Side Mounted Sensor Actuator)
□ T5 - Non-Hold-Open Feature
□ T6 - Wall flange with allen set screw
□ T36 - Solid ring wall support for flush connection
□ T46 - Split ring wall support for flush connection
□ VPS - Vandal Proof Control Stop with Key

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-

☐ Logo - Customized Cover Cap w/ Logo

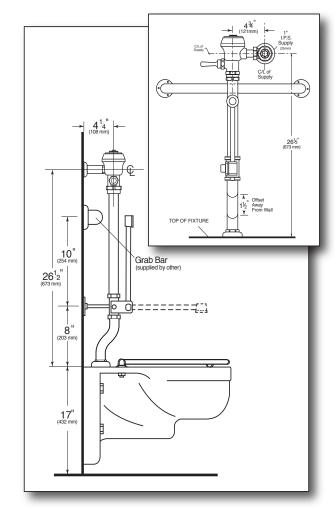











**ASSE 1037**