

## ULTRA Plus HYDRO-FLUSH CONCEALED

### Description

Concealed rough brass flush valve hydraulically activated for 1.5" back entry wall hung or floor mounts water closets.

### Flush Cycle

1.6 gpf / 6 Lpf Low Consumption

### Specification

- Regulating screw for "True-in-the-Field" water conservation.
- Mashaerator self-cleaning bypass diaphragm.
- 1" wheel handled operated angle stop with back-check.
- Renewable main valve seat.
- ADA compliant hydro-flush actuator with pushbutton through the wall assembly. (or replaced by fixture manufacturer)
- 1.5" x 14.5" vacuum breaker with elbow flush connection for 1.5" back entry.
- SlipFit adjustable tailpiece.
- Sweat adapter kit.
- All rubber parts molded of chloramine resistant rubber.
- All exposed parts chrome plated.


### Variations

- ☐ C - 3" Oscillating Disc
- ☐ GJ - Ground Joint Connection
- ☐ J - Screwdriver operated cotrol stop
- ☐ T48 - Valve for use with an access panel
- ☐ TS - TruStop 1" Angle Control Stop

\*Access Panels Supplied by Others\*

\* Wall Size Required at time of Order. Size Range from 1" to 12"  
Pricing will vary based upon size. \*

Valve shall be in compliance to the applicable sections of ASSE 1037

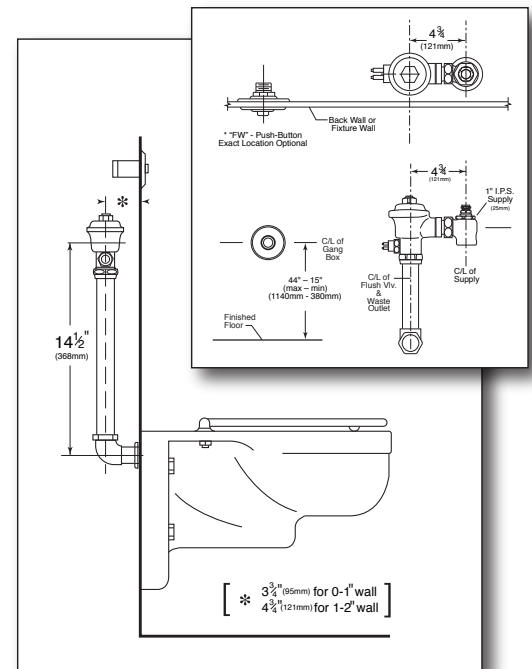

P.O. Box 411 • Charlottesville • VA • 22902 • USA Phone: (434) 296-0166 • Fax (434) 977-3596  
Email: info@delanyproducts.com Web: www.delanyproducts.com ©2015 v3

