

UP414-1.6

LOW CONSUMPTION TOILET FLUSH VALVE
(1.6 gpf / 6 Lpf per Flush)

ULTRA Plus

Description

Exposed chrome plated flush valve for 1-1/2" top spud fixtures.

Flush Cycle

1.6 gpf / 6 Lpf Low Consumption


Specification

- Regulating screw for "True-in-the-Field" water conservation.
- Masherator self-cleaning bypass diaphragm.
- ADA compliant metal "Rubberflex" oscillating handle.
- Renewable main valve seat.
- 1" vandle resistant capped screwdriver angle stop with back-check.
- Sweat adapter kit.
- SlipFit adjustable tailpiece.
- 1-1/2" x 24" vacuum breaker flush connection.
- Wall flange, spud nut and spud flange for 1-1/2" top spud.
- All rubber parts molded of chloramine resistant rubber.

Variations

- ☐ AM - Antimicrobial Coated Handle
- ☐ G - Bumper on angle stop (for seat without cover)
- ☐ SM - Side Mounted Sensor Actuator
- ☐ T5 - Non-Hold-Open Feature
- ☐ T36 - Solid ring wall support for flush connection
- ☐ T46 - Split ring wall support for flush connection
- ☐ TS - TruStop Ball valve designed Control Stop
- ☐ VPS - Vandal Proof Control Stop with Key

Valve is certified to be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2

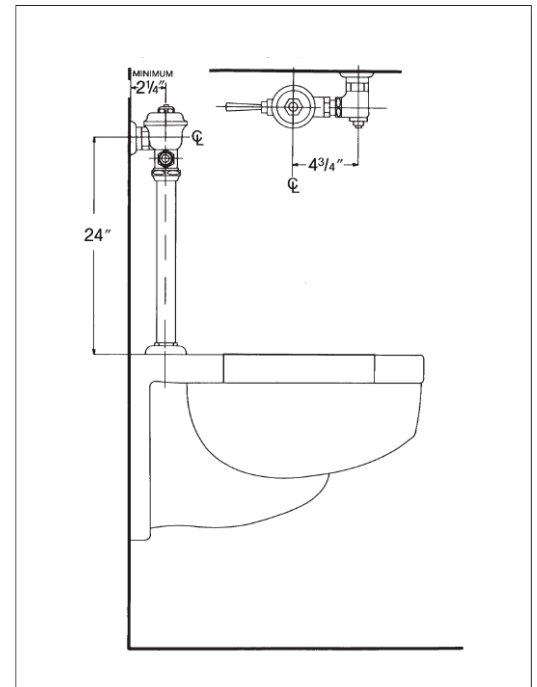

ASSE 1037

