

# UP418-6.5

FLUSH VALVE for CLINICAL SERVICE SINK  
(6.5 gpf / 24.6 Lpf per Flush)

## ULTRA Plus

### Description

Chrome plated exposed flush valve for Clinical Service Sinks.

### Flush Cycle

6.5 gpf / 24.6 Lpf


### Specification

- Regulating screw for "True-in-the-Field" water conservation.
- Mashaerator self-cleaning bypass diaphragm.
- ADA compliant "Rubberflex" oscillating handle assembly.
- Renewable main valve seat.
- 1" vandle resistant capped screwdriver angle stop with back-check.
- Sweat adapter kit.
- SlipFit adjustable tailpiece.
- Vacuum breaker w/ 24" rough-in flush connection
- Wall flange, spud nut and spud flange for 1-1/2 top spud.
- All rubber parts molded of chloramine resistant rubber.

### Variations

- ☐ AM - Antimicrobial Coated Handle
- ☐ GJ - Ground Joint Tailpiece
- ☐ SH - SmartHandle Dual-Flush with Antimicrobial Coating
- ☐ SM - SideArm (Side Mounted Sensor Actuator)
- ☐ T5 - Non-Hold-Open Feature
- ☐ T36 - Solid ring wall support for flush connection
- ☐ T46 - Split ring wall support for flush connection
- ☐ TS - TruStop - Ball valve designed Control Stop
- ☐ VPS - Vandal Proof Control Stop with Key

Valve is certified to be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2

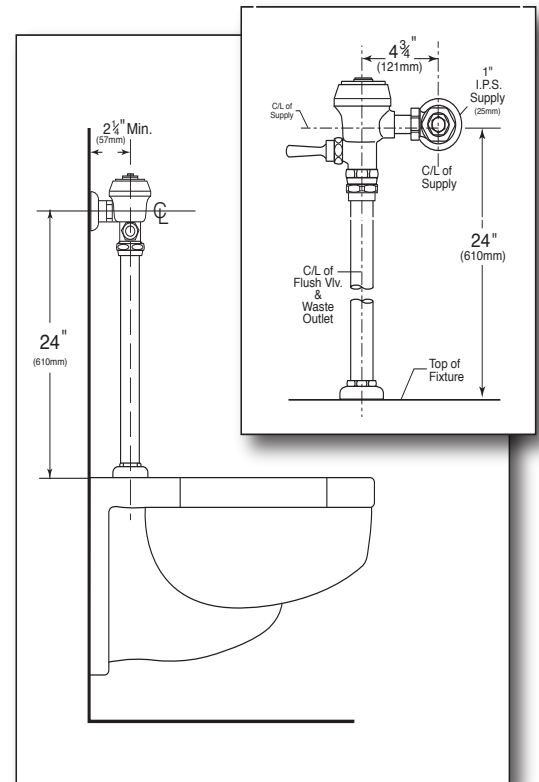

ASSE 1037

