

E463-1.6

LOW CONSUMPTION TOILET FLUSH VALVE (1.6 gpf / 6 Lpf)

Empire w/ Bedpan Diverter for 26-1/2" Rough-in

Description

Polished chrome plated piston operated flush valve with Delany Bedpan Diverter valve for 1-1/2" top spud water closets.

Flush Cycle


1.6 gpf / 6 Lpf Low Consumption

Specification

- Nickel plated solid brass piston cartridge.
- Masserator self-cleaning diaphragm.
- ADA compliant "Rubberflex" oscillating handle assembly.
- 1" vandal resistant capped screwdriver angle stop with back-check.
- Sweat adapter kit.
- SlipFit adjustable tailpiece.
- Delany Bedpan Diverter Spray Arm.
- Vacuum breaker flush connection assembly for 26-1/2" rough-in.
- Wall flange, spud nut and spud flange for 1-1/2" top spud.
- All rubber parts molded of chloramine resistant rubber.

Variations

- ☐ AM - Ultra-Violet Shield antimicrobial coating for handle
- ☐ SH - SmartHandle Dual-Flush with Antimicrobial Coating
- ☐ SM - SideArm (Side Mounted Sensor Actuator)
- ☐ T36 - Solid ring wall support for flush connection
- ☐ T46 - Split ring wall support for flush connection
- ☐ TS - TruStop - Ball Valve Designed Control Stop
- ☐ VPS - Vandal Proof Control Stop with Key

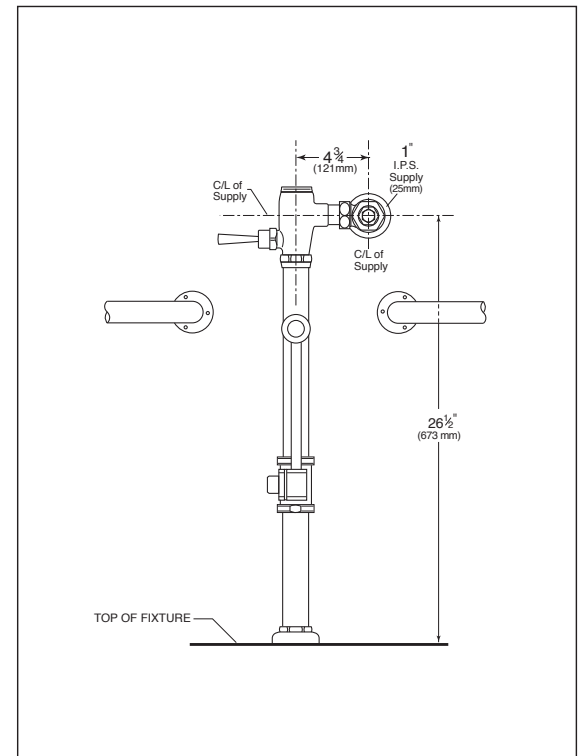

Valve is certified to be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2



ASSE 1037

