

PL1455-1.6-DF

AUTOMATIC DUAL FLUSH FLUSH VALVE
(1.6/1.1 gpf & 6.0/4.2 Lpf per Flush)

PULSAR V2.0 w/ Bedpan Diverter

Description


Battery powered, sensor activated, diaphragm operated, chrome plated exposed flush valve with Delany Bedpan Diverter valve for 1-1/2" floor mounted or wall hung top spud water closet.

Flush Cycle

Regular Delivery: 1.6 gpf/6.0 Lpf for Solid Waste flushing cycle.
Short Delivery: 1.1 gpf/4.2 Lpf for Liquids flushing cycle.

Specification

- SmartChoice Technology software provides field adjustability for True-in-the-Field Water Conservation.
- 6 Volt DC non-latching solenoid valve.
- 6 Volt DC lithium batter (2CR5 type).
- Infrared sensor with Dual Infrared Transmitter Technology
- Field adjustable range.
- Chloramine resistant diaphragm.
- Arming delay of 10 seconds prevents unintentional flushes.
- Electronic courtesy flush push button.
- Renewable main valve seat.
- 1" vandle resistant capped screwdriver angle stop with back-check.
- Sweat Adapter Kit.
- SlipFit adjustable tailpiece.
- Delany Bedpan Diverter Spray Arm.
- Vacuum breaker w/ 34-3/8" rough-in flush connection.
- Wall flange, spud nut and spud flange for 1-1/2" top spud.
- All rubber parts molded of chloramine resistant rubber.

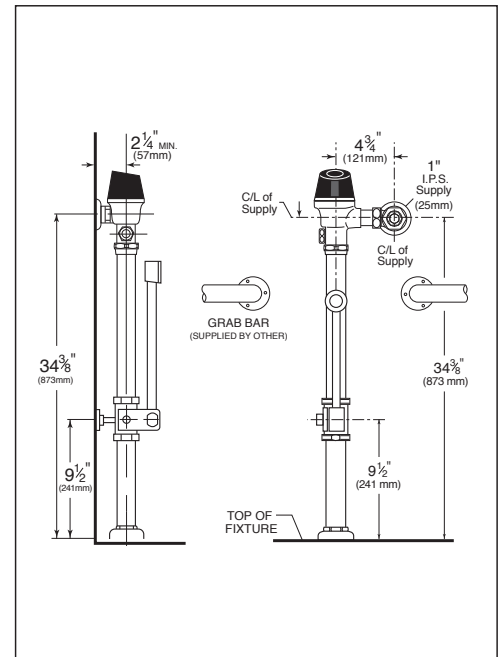

Variations

- T36 - Solid ring wall support for flush connection
- T46 - Split ring wall support for flush connection
- TS - TruStop Control Stop
- VPS - Vandal Proof Control Stop with Key

Valve is in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2

