

SABER

Description

Exposed chrome plated flush valve for 1 1/2" Top Spud Eastern Squat Toilets.

Flush Cycle

1.6 gpf / 6.0 Lpf Low Consumption


Specification

- Diaphragm Operation
- Upper Chamber Regulating Screw for "True-in-the-Field" water conservation.
- Masherator self-cleaning bypass diaphragm.
- Scratch Proof Recessed Hex-nut designed cover.
- ADA compliant metal "Rubberflex" oscillating handle.
- Renewable main valve seat.
- 1" vandal resistant capped screwdriver angle stop with back-check.
- Sweat adapter kit.
- SlipFit adjustable tailpiece.
- 1-1/2" x 36" vacuum breaker flush connection for top spud Eastern Squat Toilets.
- All rubber parts molded of chloramine resistant rubber.

Variations

- ☐ AM - Antimicrobial Coated Handle
- ☐ O - 1-1/4" Flush Connection
- ☐ SQT8 - 1-1/2" x 36" x 8" vacuum breaker flush connection with elbow for back entry
- ☐ T5 - Non-Hold-Open Feature
- ☐ T6 - Wall flange with allen set screw
- ☐ T36 - Solid ring wall support for flush connection
- ☐ T46 - Split ring wall support for flush connection
- ☐ VPS - Vandal Proof Control Stop with Key

Valve is certified to be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2

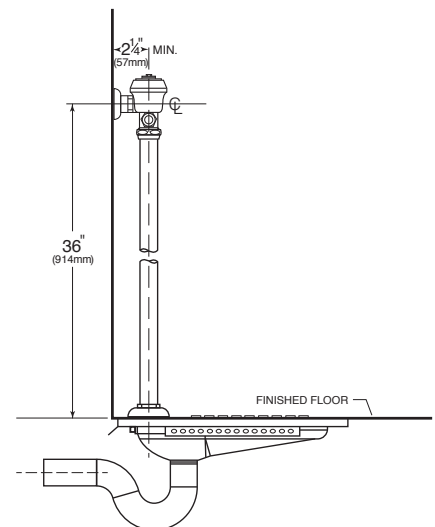

P.O. Box 411 • Charlottesville • VA • 22902 • USA Phone: (434) 296-0166 • Fax (434) 977-3596
Email: info@delanyproducts.com Web: www.delanyproducts.com ©2018 v1



ASSE 1037

