

S402-1.6-SH-TS

DUAL FLUSH TOILET FLUSH VALVE
(1.6 gpf / 1.1 gpf per Flush)

TruSABER w/ SMARTHANDLE

Description

Chrome plated diaphragm operated flush valve for floor mounted or wall hung 1-1/2" top spud bowls.

SmartHandle enabled Saber Features:

- *Pressing handle **DOWN** delivers 1.6gpf/6Lpf flush cycle for solid waste.
- *Lifting handle **UP** delivers 1.1gpf/4.2Lpf for liquid waste (a water savings of 31%)
- *Green colored Antimicrobial coating for germ resistance.


Specifications

- Scratch proof recessed hex-nut designed cover
- Mashaerator, self-cleaning bypass, Diaphragm.
- Regulating screw for "True-in-the-Field" water conservation
- 1" vandle proof TruStop ball valve designed angle control stop with TruChek.
- Sweat adapter kit.
- Removeable main valve seat.
- ADA compliant metal "Rubberflex" oscillating handle.
- All rubber material made of chloramine resistant material
- Slip-Joint adjustable tailpiece.
- Vacuum breaker.
- Wall flange, spud nut and spud flange for 1-1/2" top spud.


Variations

- ☐ SM - Side mounted battery powered sensor actuator
- ☐ T6 -Wall flange with allen set screw
- ☐ T36 -Solid ring wall support for flush connection
- ☐ T46 -Split ring wall support for flush connection
- ☐ VPS -Vandal Proof Control Stop with Key
- ☐ Logo - Customized Cover Cap w/ Logo

Valve is certified to be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2

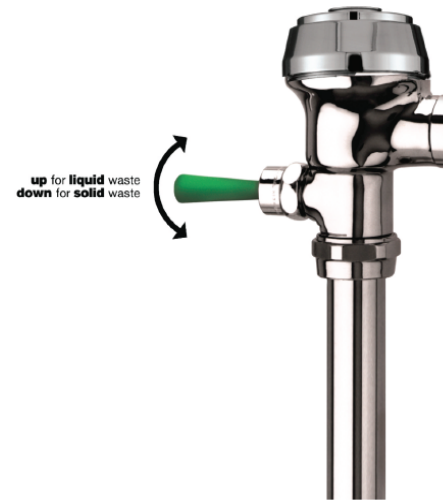

Patented TruStop Control Stop

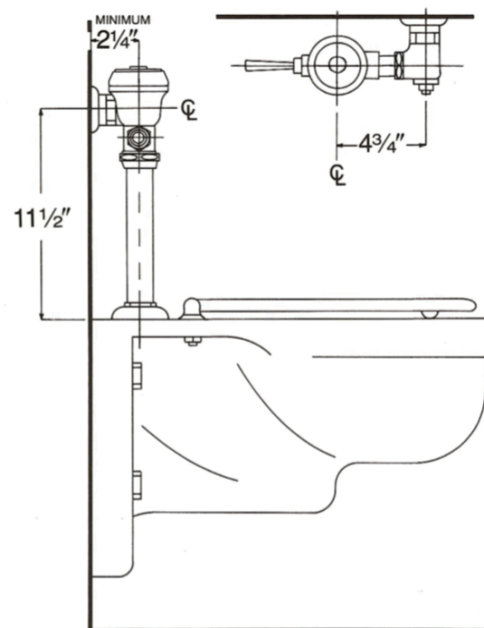

P.O. Box 411 • Charlottesville • VA • 22902 • USA Phone: (434) 296-0166 • Fax (434) 977-3596
Email: info@delanyproducts.com Web: www.delanyproducts.com ©2015 v3



ASSE 1037

