

# S451-0.125-SM

HIGH EFFICIENCY URINAL FLUSH VALVE  
(0.125 gpf / 0.5 Lpf)

## SABER

### Description

Exposed chrome plated flush valve for 3/4" top spud urinals with side mounted sensor activated actuator ("SideArm")

### Flush Cycle

0.125 gpf / 0.5 Lpf High Efficiency

### Specification


- SideArm (side mounted sensor actuator)
- Regulating screw for "True-in-the-Field" water conservation.
- Mashaerator self-cleaning bypass diaphragm
- 3/4" vandle resistant capped screwdriver angle stop with back-check.
- Sweat adapter kit
- Renewable main valve seat
- ADA compliant metal "Rubberflex" oscillating handle.
- Slip-Joint adjustable tailpiece
- 3/4" x 9" vacuum breaker flush connection
- Wall flange, spud nut and spud flange for 3/4" top spud
- All rubber parts molded of chloramine resistant rubber

### Variations

- ☐ AM - Antimicrobial Coated Handle
- ☐ G - Bumper on Control Stop for Seat
- ☐ SH - SmartHandle Dual-Flush with Antimicrobial Coating
- ☐ T5 - Non-Hold-Open Feature
- ☐ T6 - Wall flange with allen set screw
- ☐ T36 - Solid ring wall support for flush connection
- ☐ T46 - Split ring wall support for flush connection
- ☐ VPS - Vandal Proof Control Stop with Key
- ☐ Logo - Customized Cover Cap w/ Logo

Valve is certified to be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2

\* Recommended for both hard water and highly chlorinated water conditions.

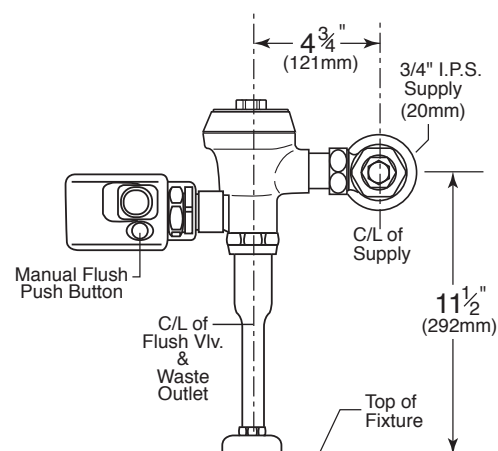

ASSE 1037

P.O. Box 411 • Charlottesville • VA • 22902 • USA Phone: (434) 296-0166 • Fax (434) 977-3596  
Email: [info@delanyproducts.com](mailto:info@delanyproducts.com) Web: [www.delanyproducts.com](http://www.delanyproducts.com) ©2015 v3