

EDGE

Description

Battery powered, sensor activated, diaphragm operated, chrome plated exposed flush valve for 1-1/2" floor mounted or wall hungtop spud water closet.

Flush Cycle

1.1 gpf / 4.2 Lpf High Efficiency


Specification

- SmartChoice Technology software provides field adjustability for True-in-the-Field Water Conservation
- Remote for Range & Discharge Adjustability.
- Chloramine resistant diaphragm.
- 6 Volt DC latching solenoid valve.
- 6 Volt DC lithium battery (CR-P2 type).
- Infrared sensor with Dual Infrared Transmitter Technology
- Arming delay of 10 seconds prevents unintentional flushes
- Electronic courtesy flush push button.
- 1" vandle resistant capped screwdriver angle stop with back-check.
- Renewable main valve seat.
- Sweat Adapter Kit.
- Vacuum Breaker w/ 9" flush connection.
- Wall flange, spud nut and spud flange for 1-1/2" top spud.
- All rubber parts molded of chloramine resistant rubber.

Variations

- ☐ GJ - Ground Jount Tailpiece
- ☐ SC - SlipFit Connection (adjustable joint tailpiece)
- ☐ G - Bumper on angle stop (for seat without cover)
- ☐ T36 - Solid ring wall support for flush connection
- ☐ T46 - Split ring wall support for flush connection
- ☐ TS - TruStop - Ball valve designed Control Stop
- ☐ VPS - Vandal Proof Control Stop with Key

Valve is in compliance with the applicable sections of ASSE 1037.

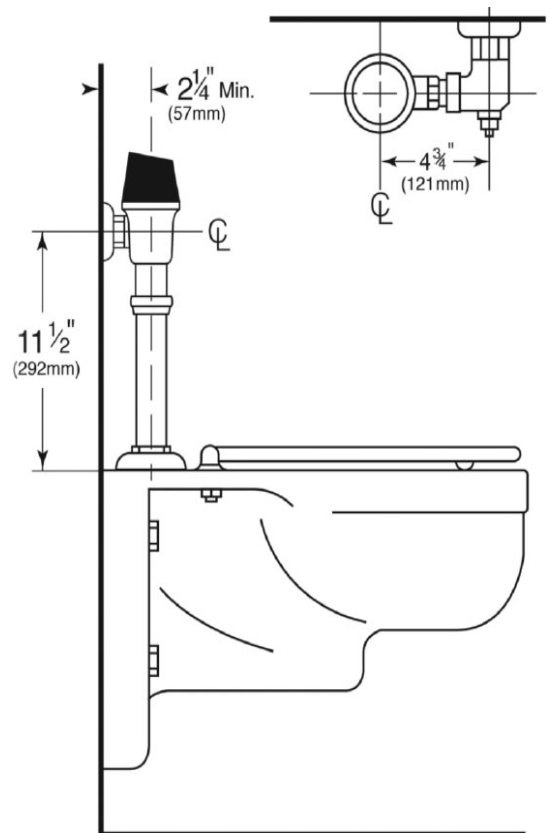

Note: Min.roughing height 10 1/2" centerline of supplu to top of fixture.

