

## TruEMPIRE with SideArm

### Description

Exposed chrome plated, piston operated, flush valve for 3/4" top spud urinals with side mounted sensor actuator.

### Flush Cycle

0.5 gpf / 1.9 Lpf High Efficiency


### Specification

- SideArm (Side Mounted Sensor Actuator)
  - Infrared Sensor with user indicator light
  - 6 volts DC low voltage four "C" batteries
  - 8 second arming delay to prevent unintentional flushes
- Nickel plated solid brass piston cartridge.
- Masherator self-cleaning bypass.
- ADA compliant metal "Rubberflex" oscillating handle.
- 1" vandle resistant capped screwdriver angle stop with back-check.
- Sweat adapter kit.
- Slip-Joint adjustable tailpiece.
- 3/4" x 9" vacuum breaker flush connection.
- Wall flange, spud nut and spud flange for 1.5" top spud.
- All rubber parts molded of chloramine resistant rubber

### Variations

- ☐ AM - Antimicrobial Coated Handle
- ☐ T36 - Solid ring wall support for flush connection

Valve is certified to be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2 WaterSense Listed and compliant when paired with a WaterSense compliant fixture.

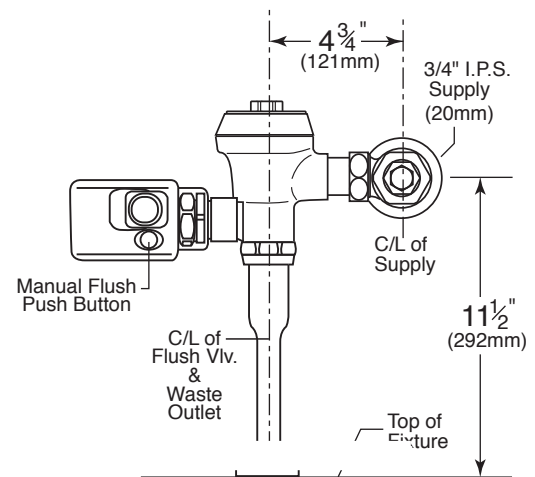

ASSE 1037

